




KEY FUNCTION
Pull out the plastic battery barrier sheet from the battery compartment located on the bottom of the remote before key operation.

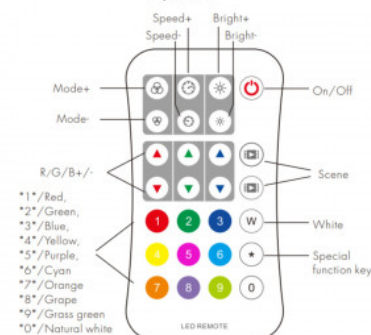

Mando a distancia para controlador de tiras LED IC RGB/RGBW SPI - 1 Zona - RF 2.4G

Ref. SK-R9

Mando a distancia RF para tiras LED digitales (IC) RGB y RGBW. Permite ajustar el brillo en cada color de forma independiente, control de modos dinámicos y escenas, etc. Puede controlar una zona. Cuenta con una rápida velocidad de comunicación y una distancia de transmisión de 30 m. Funciona con batería CR3032 (no incluida).

Mode+/-: Short press switch dynamic mode built in controller, long press 2s Mode+ run mode cycle, long press 2s Mode- run the first mode.

The remote is default 10 dynamic mode, when match with SPI controller which have 32 dynamic mode, please long press 2s Mode+ key firstly.

Speed+/-: Adjust dynamic mode speed, short press 10 levels, long press 2s get the fastest / slowest speed.

Bright+/-: Adjust brightness, short press 10 levels, long press 1-6s for continuous 256 levels adjustment.

R/G/B+/-: Adjust R/G/B brightness respectively, short press 10 levels, long press 1-6s for continuous 256 levels adjustment to achieve millions of colors.

White: Adjust white color, for RGB light, short press turn on/off white(RGB mix), long press 1-6s adjust saturation continuously.

For RGBW light, press W key will adjust W channel brightness. short press turn on/off W channel.

long press 1-6s adjust W channel brightness continuously.

Scene: Short press recall the scene, long press 2s save the current color into the scene. The LED indicator will light up longer when save OK.

Datos del producto

Tonalidad	RGB, RGB-W
Dimensiones (mm) LxIxh	107 x 58,5 x 9
Rango temperatura	-30°C ~ +55°C
Certificados	CE, ROHS
Garantía	5 años
Conectividad	RF
Tipo de batería	3VDC (CR2032)
Distancia de control	30m
Peso (kg)	0.058

