




KEY FUNCTION
Pull out the plastic battery barrier sheet from the battery compartment located on the bottom of the remote before key operation.

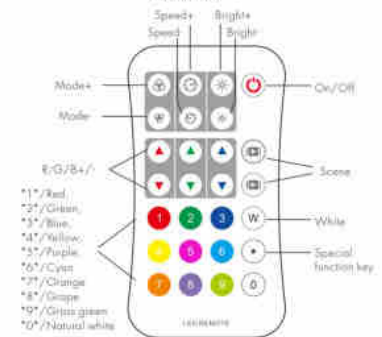

Ver Controlemechanisme voor RGB/RGBW SPI LED Strip Controlemechanisme IC - 1 Zone - RF 2.4G

Ref. SK-R9

RF-afstandsbediening voor RGB en RGBW digitale LED-strips (IC). Hiermee kan de helderheid voor elke kleur afzonderlijk worden aangepast, kunnen dynamische modi en scènes worden geregeld, enz. Kan één zone bedienen. De afstandsbediening heeft een hoge communicatiesnelheid en een zendafstand van 30 m. Gevoed door CR3032-batterij (niet meegeleverd).

Mode+/-: Short press switch dynamic mode built in controller, long press 2s Mode+ run mode cycle, long press 2s Mode- for the first mode. The remote is default 10 dynamic mode, when match with 2ft controller which have 32 dynamic mode, please long press 2s Mode+ key firstly.

Speed+/-: Adjust dynamic mode speed, short press 10 levels, long press 2s get the fastest / slowest speed.

Bright+/-: Adjust brightness, short press 10 levels, long press 1-6s for continuous 256 levels adjustment.

R/G/B+/-: Adjust R/G/B brightness respectively, short press 10 levels, long press 1-6s for continuous 256 levels adjustment to achieve millions of colors.

White: Adjust white color, for RGB light, short press turn on/off white(RGB) mid, long press 1-6s adjust saturation continuously.

For RGBW light, press W key will adjust W channel brightness, short press turn on/off W channel, long press 1-6s adjust W channel brightness continuously.

Scene: Short press recall the scene, long press 2s save the current color into the scene. The LED indicator will light up twice when save OK.

Product data

Schaduw	RGB, RGB-W
Afmetingen (mm) LxIxh	107 x 58,5 x 9
Temperatuurbereik	-30u00b0C ~ +55u00b0C
Certificaten	EC, ROHS
Garantie	5 jaar
Connectiviteit	RF
Type batterij	3VDC (CR2032)
Controleafstand	30m
Nettogewicht (kg)	0.058

