




**KEY FUNCTION**  
Pull out the plastic battery barrier sheet from the battery compartment located on the bottom of the remote before key operation.

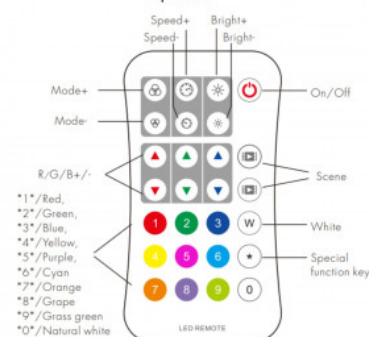

**Controle Remoto para controlador de Fita LED RGB/RGBW SPI IC - 1 Zona - RF 2.4G**

**Ref. SK-R9**

Controle remoto RF para fitas de LED digitais (IC) RGB e RGBW. Permite a regulação independente do brilho em cada cor, o controle dos modos dinâmicos e das cenas, etc. Pode controlar uma zona. Tem uma velocidade de comunicação rápida e uma distância de transmissão de 30m. Funciona com uma pilha CR3032 (não incluída).

**Mode+/-:** Short press switch dynamic mode built in controller, long press 2s Mode+ run mode cycle, long press 2s Mode- run the first mode. The remote is default 10 dynamic mode, when match with SPI controller which have 32 dynamic mode, please long press 2s Mode+ key firstly.

**Speed+/-:** Adjust dynamic mode speed, short press 10 levels, long press 2s get the fastest / slowest speed.

**Bright+/-:** Adjust brightness, short press 10 levels, long press 1-6s for continuous 256 levels adjustment.

**R/G/B+/-:** Adjust R/G/B brightness respectively, short press 10 levels, long press 1-6s for continuous 256 levels adjustment to achieve millions of colors.

**White:** Adjust white color, for RGB light, short press turn on/off white(RGB mix), long press 1-6s adjust saturation continuously. For RGBW light, press W key will adjust W channel brightness. short press turn on/off W channel, long press 1-6s adjust W channel brightness continuously.

**Scene:** Short press recall the scene, long press 2s save the current color into the scene. The LED indicator will light up longer when save OK.

**Datos del producto**

Tonalidade	RGB, RGB-W
Dimensões (mm) LxIxh	107 x 58,5 x 9
Intervalo de temperatura	-30°C ~ +55°C
Certificados	CE, ROHS
Garantia	5 anos
Conectividade	RF
Tipo de bateria	3VDC (CR2032)
Distancia de control	30m
Peso (kg)	0.058

