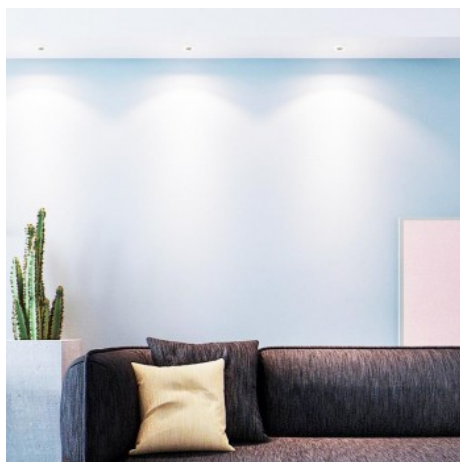


OSRAM

3W
 UGR<19


Downlight LED recessed Mini 3W Low UGR 40x32,1 mm


Ref. B1251

3Wmini LED downlight made of high quality aluminum, with efficient heat dissipation and long durability. This type of downlight is ideal for focused or ambient lighting, exclusive for indoor, IP20. The downlight is usually installed in any interior: living rooms, corridors, offices, hotels, restaurants, exhibition halls, etc. Very discreet after installation, the downlight will be perfectly integrated into the ceiling, with black or white finish. High brightness, with a low consumption of 3W and an opening angle of 30°. CRI>90. LiFud driver and OSRAM SMD LED chip. Pleasant light to the eye, low UGR, and a comfortable atmosphere, thanks to the warm 2700°K shade. Reduced dimensions of Ø40x32,1. Cutting diameter of Ø35mm.



Product data

Hue	Warm white
Kelvin (K)	2700
CRI	90-95
Beam angle (°)	30
UGR	< UGR19
LED Type	SMD OSRAM
Nominal Voltage (V)	200-240V-AC
Frequency (Hz)	50 - 60
Driver	LIFUD
Sensor	No
Orientable	No
Dimensions (mm) LxIxh	Ø40x32,1
Material	Aluminium
Use Outdoor	No
IP	IP20
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Cutting dimensions (mm)	Ø35

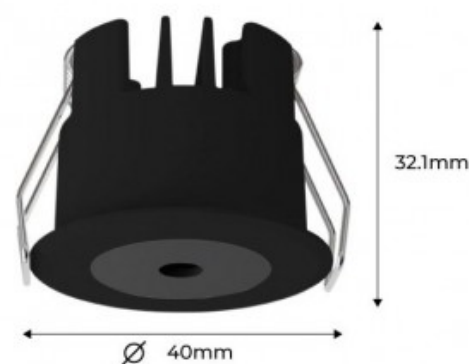

Mounting _____ Recessed _____

Product variants

Reference

Attributes

B1251-N-270

Colour temperature - Warm white 2700K, Colour - Black



B1251-B-270

Colour temperature - Warm white 2700K, Colour - Whit



e