


**LIFUD**  
**OSRAM**  
**DALI**

**3W**  
**UGR<19**

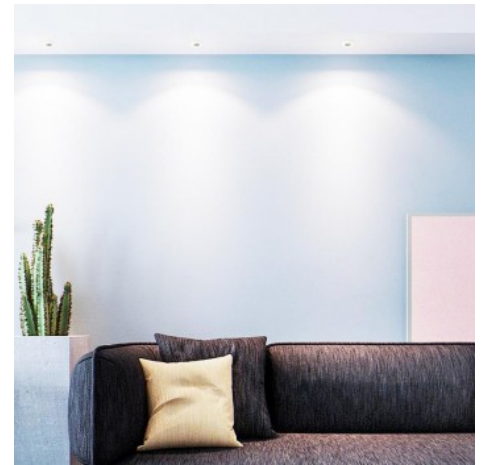

## Downlight MINI LED recessed downlight 3W Low UGR Dimmable DALI

### Ref. B1251-270-DALI


Mini LED downlight dimmable by DALI. The downlight includes a Lifud DALI/Push driver that makes the luminaire compatible with DALI dimming systems. This type of downlight is ideal for focused lighting with a low power consumption of 3W. The downlight is manufactured with OSRAM SMD chips that guarantee its high light quality: High color rendering index(CRI>90), closed opening angle of 30° and a warm light temperature of 2700K. Pleasing to the eye thanks to the luminaire's low UGR, creating a comfortable atmosphere. The downlight can be installed in any interior: living rooms, corridors, offices, hotels, restaurants, showrooms, etc. Very discreet after installation, the downlight will be perfectly integrated in the ceiling, with black or white finish. Reduced dimensions of Ø40x32,1. Diameter of cut of Ø35mm.



### Product data



Hue	Warm white
Kelvin (K)	2700
CRI	90-95
Beam angle (°)	30
UGR	< UGR19
LED Type	Chip OSRAM
Dimmable	Yes
Nominal Voltage (V)	200 - 250V AC
Frequency (Hz)	50 - 60
Driver	LIFUD
Sensor	No
Orientable	No
Dimensions (mm) LxHxh	Ø40x32,1
Material	Aluminium
Use Outdoor	No
IP	IP20
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years

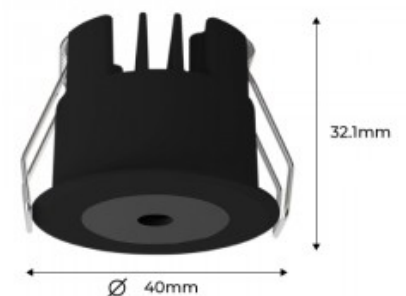SMD OSRAM  
 Corte de diametro: Ø35



Cutting dimensions (mm)	Ø35
Mounting	Recessed

## Product variants

Reference	Attributes	
B1251-B-270-DALI	Colour temperature - Warm white 2700K, Colour - Whit	 Lifud OSRAM DALI 3W UGR-19
B1251-N-270-DALI	Colour temperature - Warm white 2700K, Colour - Black	 Lifud OSRAM DALI 3W UGR-19