




Mechanical Structures and Installations

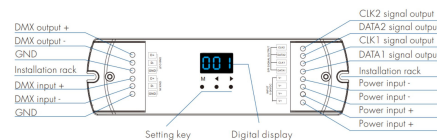


DMX512 to SPI Pixel Decoder - 5-24V DC - RF Controller

Ref. SK-DS-L

The DMX512 to SPI LED decoder converts DMX signals to SPI signals to control smart or digital RGB or RGBW LED strips. It also functions as an RF controller and can be paired with a 2.4GHz RF controller for convenient and wireless control. It features a digital display and is compatible with numerous types of LED IC chips. It allows you to create a variety of stunning and customized lighting effects for your projects.

Wiring Diagram

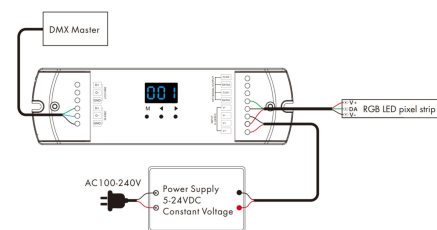

Datos del producto

Nominal Voltage (V)	5-24V
Use Outdoor	No
IP	IP20
Temperature range	-30°C ~ +55°C
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Connectivity	DMX, Radiofrequency
Colour control	RGB, RGBW

