


## Wiring Diagram


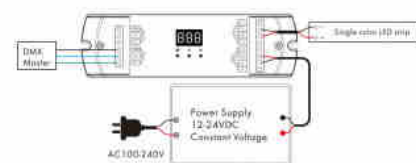


Note:  
 1. An DMX signal amplifier is needed if more than 32 decoders are connected, or one working signal line, signal amplification should not be more than 5 times continuously.  
 2. If the jitter effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 10-1000 terminal resistor at the end of each DMX signal line.

## Αποκωδικοποιητής DMX512 12-24V DC - 15A - 1 κανάλι

### Ref. SK-D1-L

Ο αποκωδικοποιητής DMX512 είναι μια συσκευή ελέγχου φωτισμού LED με 1 κανάλι εξόδου με μέγιστο ρεύμα 15A. Είναι συμβατός με τάσεις εισόδου 12-24V. Χρησιμοποιεί σήμα εισόδου DMX512 και παρέχει σήμα εξόδου PWM για ομαλό έλεγχο του φωτισμού. Υποστηρίζει τηλεχειρισμό RDM, επιλογή ανάλυσης εξόδου και ρύθμιση συχνότητας PWM.



### Product data

Onomastikh tash (V)	12-24V DC
Diastaseis (mm) LxIxh	170 x 50 x 23
Exoterikí chrísi	ochi
IP	IP20
Pistopoihtika	EK, ROHS
Egyhsh	5 xronia
Syndesimothta	DMX
Tash exodou (V)	12 - 24 V
Arithmos kanaliwn	1
Megisto reuma (A)	15

