




140lm/W
High Efficiency



LIFUD®

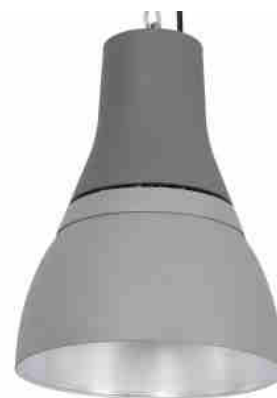

Commercial LED High Bay - CCT - (25W / 40W / 60W / 80W) - Aluminum diffuser - UGR 19 - Lifud Driver 0-10V


Ref. B8850-AL-CCT

Commercial CCT LED high bay light with adjustable power (25W / 40W / 60W / 80W) and aluminum diffuser. It provides high-quality lighting with CRI > 80 and minimal glare (UGR < 19), ensuring optimal visual comfort. Adjustable color temperature (3000K / 4000K). Specially designed for retail and commercial spaces, it highlights your products with exceptional lighting.



Product data

Hue	CCT
Kelvin (K)	4000, 5000
Lumens (Lm)	11200
Efficiency (Lm/w)	140
CRI	80-85
UGR	< UGR19
Power (W)	60, 40, 25, 80
Nominal Voltage (V)	120-277 V AC
Power factor (cosφ)	0.95
Driver	LIFUD
Material	Aluminium
Use Outdoor	No
IP	IP40
Temperature range	-30°C ~ +55°C
Energy efficiency class	C
Certificates	CE, ROHS
Warranty	5 years
Control system	0-10V

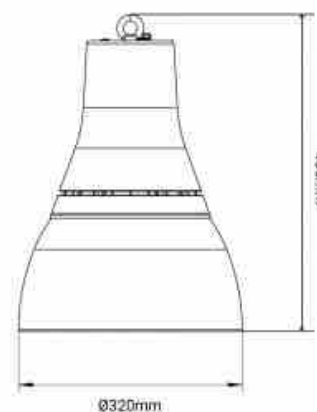

Commercial LED High Bays

Width	Ø320mm
Height	450mm