



Commercial LED High Bay - CCT - (25W / 40W / 60W / 80W) - Polycarbonate Diffuser - UGR19 - Lifud Driver


Ref. B8850-PC-CCT

Commercial CCT LED high bay light with adjustable power (25W / 40W / 60W / 80W) and transparent polycarbonate diffuser. It provides high-quality lighting with CRI > 80 and minimal glare (UGR < 19), ensuring optimal visual comfort. Adjustable color temperature (3000K / 4000K). Specially designed for retail and commercial spaces, it highlights your products with exceptional lighting.



Product data

Hue	CCT
Kelvin (K)	4000, 5000
Lumens (Lm)	11200
Efficiency (Lm/w)	140
CRI	75-80
Beam angle (°)	90°
Dimmable	Yes
Power (W)	60, 40, 25, 80
Nominal Voltage (V)	100 - 265V
Frequency (Hz)	50 - 60
Power factor (cosφ)	0.9
Driver	Internal, LIFUD
Sensor	No
Orientable	No
Material	Aluminium
Diffuser material	Polycarbonate
Use Outdoor	No
IP	IP40

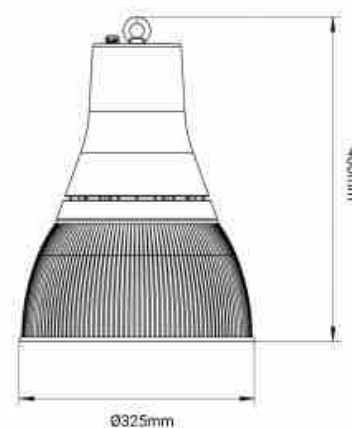

Commercial LED High Bays

Temperature range	-20°C ~ +40°C
Frequency of use	Normal
Lifetime (h)	50000
Energy efficiency class	C
Certificates	CE, ROHS
Warranty	5 years
Control system	0-10V
Length	460mm
Width	Ø325mm