




Caricamento LED	0	
Caricamento LED	0.1A	0.2A
Caricamento LED	0.3A	0.4A
Caricamento LED	0.5A	0.6A
Caricamento LED	0.8A	1.0A
Caricamento LED	1.2A	1.5A
Caricamento LED	2.0A	2.5A
Caricamento LED	3.0A	3.5A
Caricamento LED	4.0A	4.5A
Caricamento LED	5.0A	5.5A
Caricamento LED	6.0A	6.5A
Caricamento LED	7.0A	7.5A
Caricamento LED	8.0A	8.5A
Caricamento LED	9.0A	9.5A
Caricamento LED	10.0A	10.5A
Caricamento LED	11.0A	11.5A
Caricamento LED	12.0A	12.5A
Caricamento LED	13.0A	13.5A
Caricamento LED	14.0A	14.5A
Caricamento LED	15.0A	15.5A
Caricamento LED	16.0A	16.5A
Caricamento LED	17.0A	17.5A
Caricamento LED	18.0A	18.5A
Caricamento LED	19.0A	19.5A
Caricamento LED	20.0A	20.5A
Caricamento LED	21.0A	21.5A
Caricamento LED	22.0A	22.5A
Caricamento LED	23.0A	23.5A
Caricamento LED	24.0A	24.5A
Caricamento LED	25.0A	25.5A
Caricamento LED	26.0A	26.5A
Caricamento LED	27.0A	27.5A
Caricamento LED	28.0A	28.5A
Caricamento LED	29.0A	29.5A
Caricamento LED	30.0A	30.5A
Caricamento LED	31.0A	31.5A
Caricamento LED	32.0A	32.5A
Caricamento LED	33.0A	33.5A
Caricamento LED	34.0A	34.5A
Caricamento LED	35.0A	35.5A
Caricamento LED	36.0A	36.5A
Caricamento LED	37.0A	37.5A
Caricamento LED	38.0A	38.5A
Caricamento LED	39.0A	39.5A
Caricamento LED	40.0A	40.5A
Caricamento LED	41.0A	41.5A
Caricamento LED	42.0A	42.5A
Caricamento LED	43.0A	43.5A
Caricamento LED	44.0A	44.5A
Caricamento LED	45.0A	45.5A
Caricamento LED	46.0A	46.5A
Caricamento LED	47.0A	47.5A
Caricamento LED	48.0A	48.5A
Caricamento LED	49.0A	49.5A
Caricamento LED	50.0A	50.5A
Caricamento LED	51.0A	51.5A
Caricamento LED	52.0A	52.5A
Caricamento LED	53.0A	53.5A
Caricamento LED	54.0A	54.5A
Caricamento LED	55.0A	55.5A
Caricamento LED	56.0A	56.5A
Caricamento LED	57.0A	57.5A
Caricamento LED	58.0A	58.5A
Caricamento LED	59.0A	59.5A
Caricamento LED	60.0A	60.5A
Caricamento LED	61.0A	61.5A
Caricamento LED	62.0A	62.5A
Caricamento LED	63.0A	63.5A
Caricamento LED	64.0A	64.5A
Caricamento LED	65.0A	65.5A
Caricamento LED	66.0A	66.5A
Caricamento LED	67.0A	67.5A
Caricamento LED	68.0A	68.5A
Caricamento LED	69.0A	69.5A
Caricamento LED	70.0A	70.5A
Caricamento LED	71.0A	71.5A
Caricamento LED	72.0A	72.5A
Caricamento LED	73.0A	73.5A
Caricamento LED	74.0A	74.5A
Caricamento LED	75.0A	75.5A
Caricamento LED	76.0A	76.5A
Caricamento LED	77.0A	77.5A
Caricamento LED	78.0A	78.5A
Caricamento LED	79.0A	79.5A
Caricamento LED	80.0A	80.5A
Caricamento LED	81.0A	81.5A
Caricamento LED	82.0A	82.5A
Caricamento LED	83.0A	83.5A
Caricamento LED	84.0A	84.5A
Caricamento LED	85.0A	85.5A
Caricamento LED	86.0A	86.5A
Caricamento LED	87.0A	87.5A
Caricamento LED	88.0A	88.5A
Caricamento LED	89.0A	89.5A
Caricamento LED	90.0A	90.5A
Caricamento LED	91.0A	91.5A
Caricamento LED	92.0A	92.5A
Caricamento LED	93.0A	93.5A
Caricamento LED	94.0A	94.5A
Caricamento LED	95.0A	95.5A
Caricamento LED	96.0A	96.5A
Caricamento LED	97.0A	97.5A
Caricamento LED	98.0A	98.5A
Caricamento LED	99.0A	99.5A
Caricamento LED	100.0A	100.5A

Dimbare TRIAC DALI PUSH driver 0/1-10V 8-48VDC 50W multi-stroom (180-1500mA)

Ref. SRP-TRIAC-50CC

De SRP-TRIAC-50CC is een 4-in-1 dimbare 8-48V voeding: TRIAC, DALI, PUSH en 0/1-10V, waardoor hij met verschillende besturingssystemen kan werken. 50W dimbare TRIAC LED-driver, met 1-kanaals constante stroomuitgang en instelbare stroom van 180mA tot 1500mA door DIP-schakelaars, ontworpen met 200-240V-AC ingang. De LED-driver heeft een amplitude dimuitgang. Het maakt vloeiend en diep dimmen tot 1% mogelijk zonder flikkeren en zoemen. 1 DALI adres kan automatisch worden toegewezen door DALI masters.

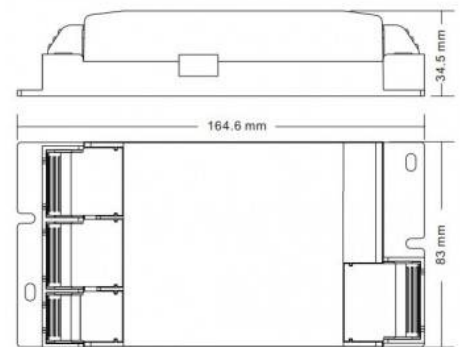

Product data

Frequentie (Hz)	50 - 60
Certificaten	EC, ROHS
Garantie	Volgens wettelijke garantie: 3 jaar
Besturingssysteem	DALI

